


Instructions for Bunny Table Topper



Fabric Needed

- 6 pastel fabrics (6.5" x 4" rectangle) for each bunny
- 1/6 yard for binding
- 1/3 yard for background
- 1/2 yard backing
- 1/4 yard of fusible web

1

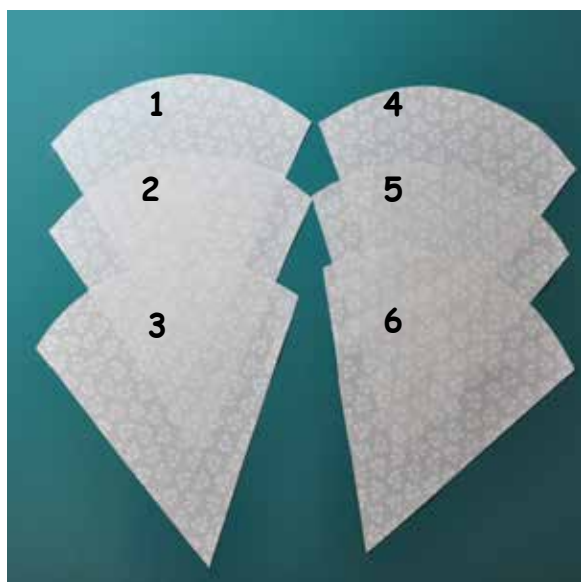


2

- Cut out the pie shaped pattern piece along the outside line to use as a pattern piece.
- Cut 6 pie shapes from background fabric using the pie shape pattern.



3

- All seams 1/4"
- Sew two pie shapes together along the straight edge with right sides together.
- Repeat with 2 more sections.
- Stitch a 3rd section to each pair.
- Press seams away from the middle pie shape in each half.

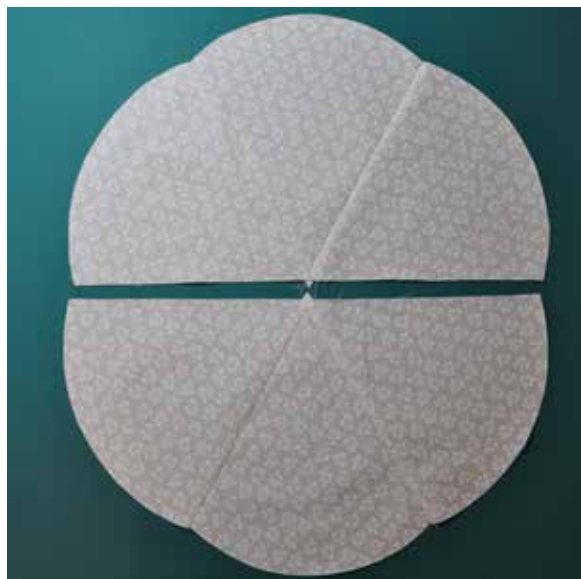

4

- Sew the 2 halves together.
- Press middle seam open to help with the bulk in the center.
- Set the background aside for now.



5

Preparing the bunnies

- Trace bunny design onto the paper side of a fusible web



6

- Press the fusible web with the bunny to the wrong side of the bunny fabric.
- The paper side with the design should be facing up.
- Follow the application instructions that come with the fusible web.



- 7** • Cut the bunny out.



- 8**
- Peel off the paper.
 - The back of the fabric should be shiny.
 - The shiny side is the side with the glue.



- 9**
- Position the bunnies around the background in a manner that is pleasing to you.
 - Make sure the bunny bottoms are 1/2" away from the curved edge of the background.
 - Press bunnies in place.



10

- Cut holes where the eyes and nose are located on the paper pattern.
- Mark with a water soluble pen where the eyes and nose are located.



11

- Satin stitch around the bunnies.
- For the eyes and nose you can sew a button, satin stitch, or do a French Knot. Watch the Youtube video for more details.



- Cut the backing fabric a little bit bigger than the top.
- Make a quilt sandwich with the backing face down, the batting next, and the table topper face up.
- Pin the layers together, and quilt.
- **For binding**, sew two 2.5" x width of fabric strips together with a mitered seam. Press in half lengthwise with wrong sides together.
- Attach to front of topper, and hand tack to the back.

